


# Perkunas

## HIGH POWER LED FLOODLIGHT




*\*All pictures shown are for illustration purpose only*


LED Flood Lights are wide angle lights designed to cover a large area or "flood" the area with light. Now powered by efficient LED technology, these lights are suitable for yard, parking lot, retail stores, warehouses and storage.




300W

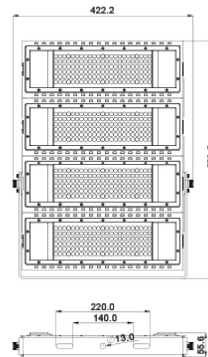


400W

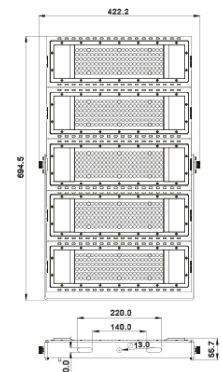


500W



600W

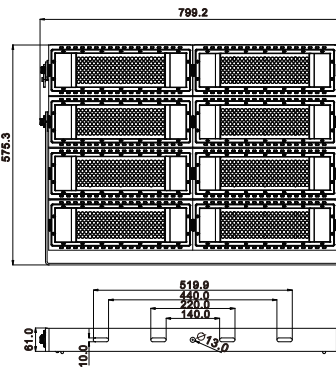

800W

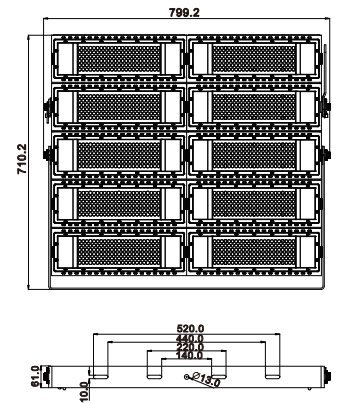

1000W

## Product Specification

Rated Power	Luminous Flux	Net Weight	Amount per Carton	Maximum Projected Area
300W	WW:28500LM/NW:30000LM/PW:31500LM	5.7KG	1PCS	0.179M <sup>2</sup>
400W	WW:38000LM/NW:40000LM/PW:42000LM	7.25KG	1PCS	0.236M <sup>2</sup>
500W	WW:47500LM/NW:50000LM/PW:52500LM	9.2KG	1PCS	0.293M <sup>2</sup>
600W	WW:57000LM/NW:60000LM/PW:63000LM	11.65KG	1PCS	0.340M <sup>2</sup>
800W	WW:76000LM/NW:80000LM/PW:84000LM	15.4KG	1PCS	0.459M <sup>2</sup>
1000W	WW:95000LM/NW:100000LM/PW:105000LM	19.0KG	1PCS	0.567M <sup>2</sup>

## The Standard Parameter of Floodlight

CCT	6500K
CRI	Ra70
Input voltage	220VAC
Frequency	50Hz
power Factor	≥0.9
Ambient temperature	-30℃~45℃
Ambient humidity	5%~95%
Storage Temperature	-40℃~70℃
beam angle	25°/60°/90°
Service Life(h)	≥35000
IP Grade	IP66
Installation	Stand Style Installation
Main material	Aluminum Alloy+PC+toughened glass
Mounting height	3~50m