


Perkunas

TITAN LED UFO HIGHBAY

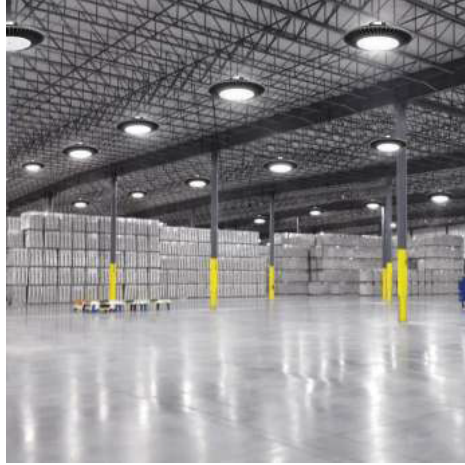


**All pictures shown are for illustration purpose only*

With the development of high bay light technology, UFO LED high bay lights have become the best choice for many large-scale industrial or commercial lighting such as high-end retail, manufacturing, sterile environments, offices, warehouses, sports complexes, storage facilities, commercial spaces, and a variety of other outdoor and indoor lighting applications.

Perkunas TITAN features a black die-cast aluminium housing. Dark powder coat corrosion resistant finish provides long hours salt fog rating. Corrosion resistant external hardware standard.

SPECIFICATION:	100W	150W	200W	240W	300W
COLOUR	6500K/5700K /4000K/3000K	6500K/5700K /4000K/3000K	6500K/5700K /4000K/3000K	6500K/5700K /4000K/3000K	6500K/5700K /4000K/3000K
SIZE	253MM*149MM	308MM*155MM	353MM*160	404MM*168	404MM*168
LUMENS	17000LM	25500LM	34000LM	40800LM	51000LM
INPUT VOLTAGE	220-240V	220-240V	220-240V	220-240V	220-240V
BEAM ANGLE	120°	120°	120°	120°	120°
CRI	≥80	≥80	≥80	≥80	≥80
POWER FACTOR	>0.9	>0.9	>0.9	>0.9	>0.9
IP RATING	IP65	IP65	IP65	IP65	IP65
LIFE TIME	30000HR	30000HR	30000HR	30000HR	30000HR
OPERATING TEMP	-40°C-55°C	-40°C-55°C	-40°C-55°C	-40°C-55°C	-40°C-55°C
PACKING	1/CTN	1/CTN	1/CTN	1/CTN	1/CTN




**6kv Surge Protective Device
30cm Safety Rope**





Perkunas

TITAN LED UFO HIGHBAY (400W & 500W)

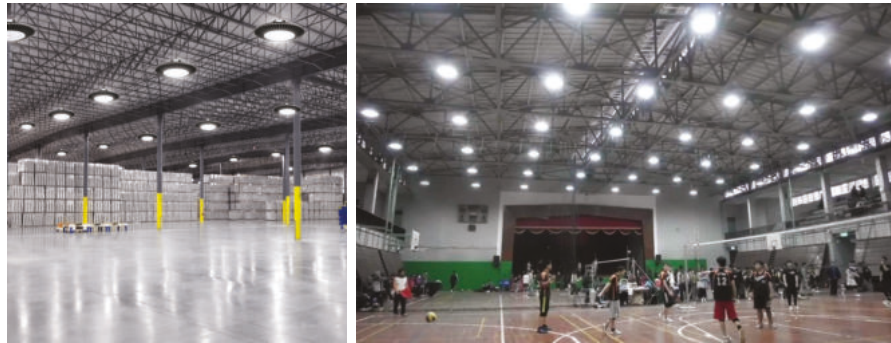


**All pictures shown are for illustration purpose only*


With the development of high bay light technology, UFO LED high bay lights have become the best choice for many large-scale industrial or commercial lighting such as high-end retail, manufacturing, sterile environments, offices, warehouses, sports complexes, storage facilities, commercial spaces, and a variety of other outdoor and indoor lighting applications.

Perkunas TITAN features a black die-cast aluminium housing. Dark powder coat corrosion resistant finish provides long hours salt fog rating. Corrosion resistant external hardware standard.

SPECIFICATION:	400W	500W
COLOUR	6500K	6500K
SIZE	232MM*360MM	232MM*360MM
LUMENS	68000LM	80000LM
INPUT VOLTAGE	100-277VAC	100-277VAC
BEAM ANGLE	60°	60°
LUMINOUS EFFICACY	170LM/W	160LM/W
INCANDESCENT/MERCURY LAMP	1000W	1500W
IP RATING	IP65	IP65
LIFE TIME	30000HR	30000HR
OPERATING TEMP	-40°C - 50°C	-40°C - 50°C
PACKING	1/CTN	1/CTN

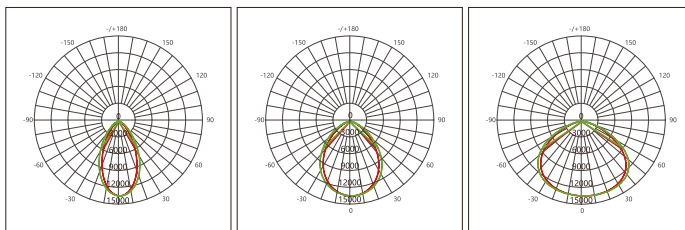

cd/klm



6kv Surge Protective Device
30cm Safety Rope

