

CEL-88

SURFACE TYPE

High Energy Efficiency & Saving
Emergency Light




Technical Information

Mode of Operation :	Non-maintained
Input Voltage :	240V \pm 10%, 50/60Hz
Battery Type :	3.2V, 1500mAH, 4.8Wh Environment Friendly Lithium-ion Battery
Lamp Type :	8pcs x 0.15W LED
Operation Temperature :	0°C to 60°C
Charger :	Constant Current
Indication Type :	Red LED "On" Indicates Charging Mode. Push Test-Switch to Simulate Power Failure.
Backup Duration :	3 Hours
Fitting Construction :	Injection Moulded Fire- Retardant Polycarbonate Casing with Side Knockout Cable Entry
Weight :	\pm 0.3kg
Warranty :	Component - 5 Years Battery - 1 Year <small>(Terms & Condition Apply)</small>
Certified Compliance :	Malaysia Standards MS-619-2-22:2005, MS IEC 60598-1:2012, IP20
Certified By :	SIRIM QAS International Sdn. Bhd. Jabatan Bomba dan Penyelamat Malaysia
Application :	Surface Mounting
Dimension :	in mm
Tolerance :	\pm 0.03mm



Dimensions

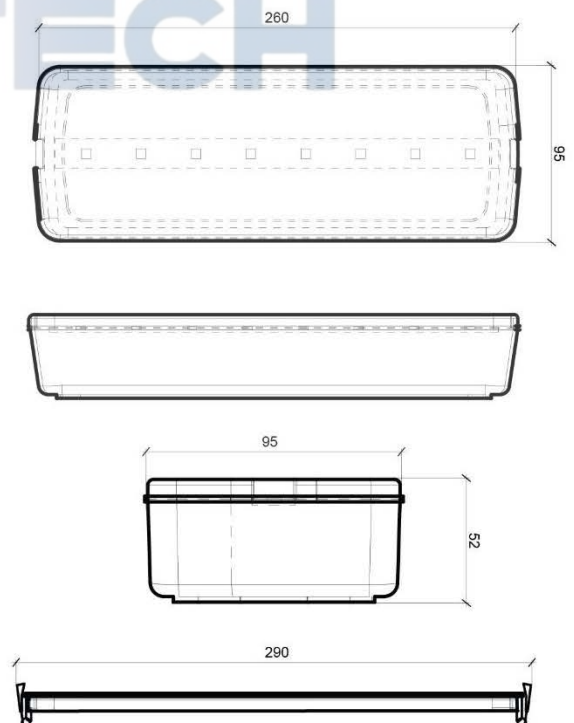

Accessories: Recessed Frame is Optional (Exclude)