

CEE-101


RECESSED TYPE

High Energy Efficiency & Saving
Emergency Light






Technical Information

Mode of Operation :	Non-maintained
Input Voltage :	240V \pm 10%, 50/60Hz
Battery Type :	Hi-Temp. Nickel Cadmium Battery
Charging Current :	70mA (Nominal)
Lamp Type :	1.0 Watt LED Class II
Lamp Output :	70lm
Operation Temperature :	ta-35°C
Charger :	Constant Current
Indication Type :	Red LED "On" Indicates Charging Mode. Push Test-Switch to Simulate Power Failure.
Backup Duration :	3 Hours
Fitting Construction :	Injection Moulded Fire- Retardant Polycarbonate Casing
Weight :	\pm 0.125kg
Warranty :	Component - 5 Years Battery - 1 Year <small>(Terms & Condition Apply)</small>
Certified Compliance :	Malaysia Standards MS-619-2-22:2005, MS IEC 60598-1:2012, IP20
Certified By :	SIRIM QAS International Sdn. Bhd. Jabatan Bomba dan Penyelamat Malaysia
Application :	Recessed Mounting
Dimension :	in mm
Tolerance :	\pm 0.03mm

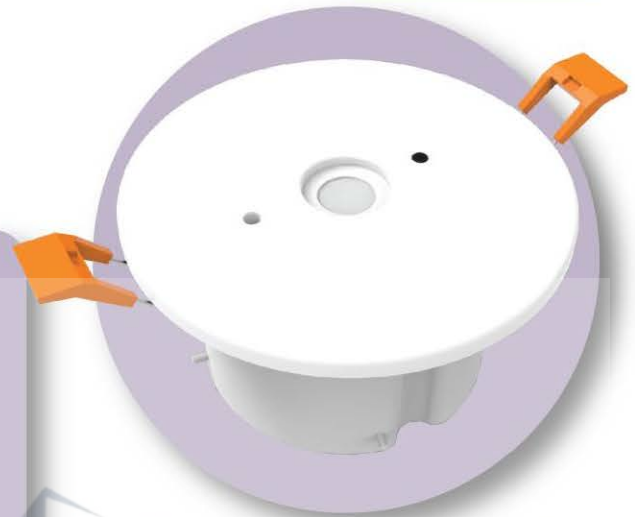

Dimensions

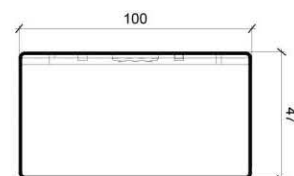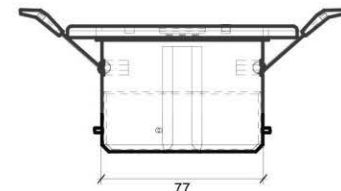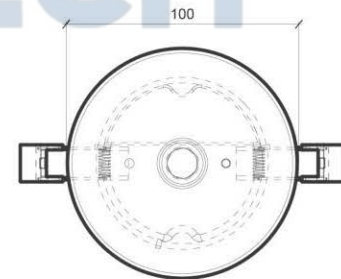

Accessories: Surface Cover is Optional (Exclude)