

BOLA BAS

Exterior Lighting / Landscape



Features

- Square shape bollard
- Modern and contemporary design
- Superior uniform illumination designed to enhance urban spaces with beautiful visual appearance
- Robust aluminium die-cast body with IK08 impact resistance
- IP65 rated dust and water ingress protection
- Includes anchor bolt mounting kit

Applications

- Architectural and landscape lighting
- Path and walkways
- Building entrances
- Residential compound
- Parks & Gardens


Options

Available in 500mm or 800mm height
0-10V/DALI dimming

Standards

- IEC/AS/NZS 60598.1
- IEC 60598-2-1
- IEC/AS/NZS CISPR 15

Mounting

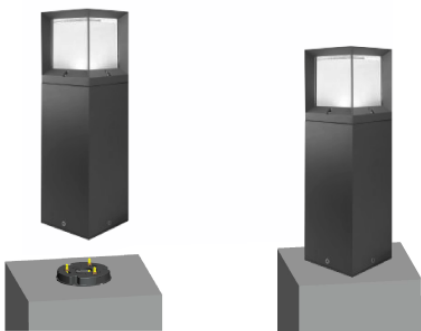

Mounting kit with anchor kits



BOLA BAS

Exterior Lighting / Landscape

Specifications


Model	BAS750-x	BAS780-x
Height (mm)	500	800
Nominal Power (W)	7	
Input Voltage (V)	220-240	
CRI (Ra)	> 80	
CCT (K)	3000/4000/5000	
Frequency (Hz)	50/60	
Luminaire Flux (lm)	640	
Luminaire Efficacy (lm/W)	76	
Luminaire Rated Life (hr)	50,000	
Operating Temp. (°C)	- 40 – 50	
IP Rating	IP65	
IK Rating	IK08	
Power Factor	0.90	
SDCM	< 3	
Body Colour	Black	
Weight (kg)	6.8	

“x” denotes CRI & CCT, R83 = CRI>80, 3000K ; R84 = CRI>80, 4000K ; R85 = CRI>80, 5000K


*Specifications shown for 4000K

Lighting Data

BAS750-x

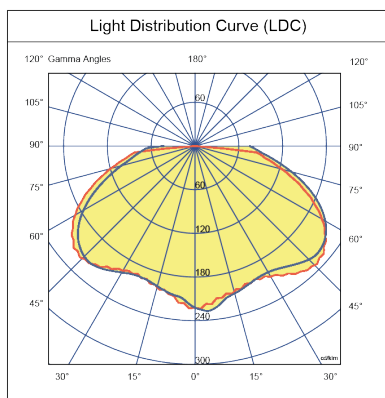



BAS780-x

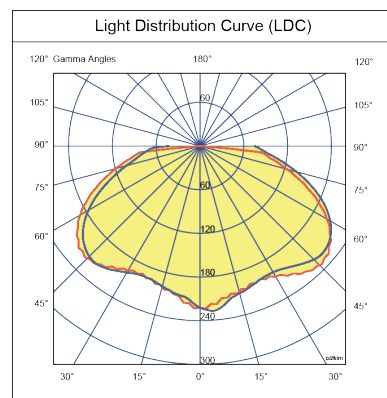

BOLA BAS

Exterior Lighting / Landscape

Dimensions

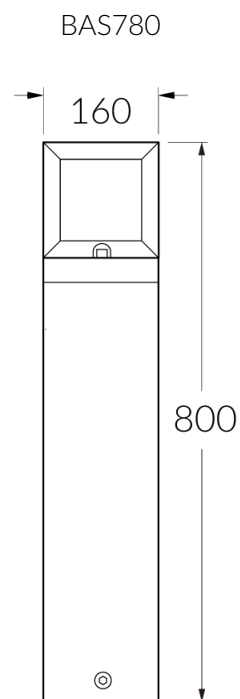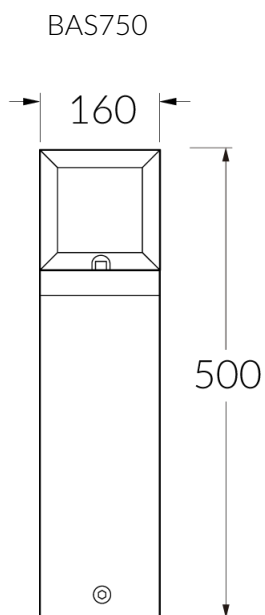

All photometric and electrical data published are of $\pm 10\%$ tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.